


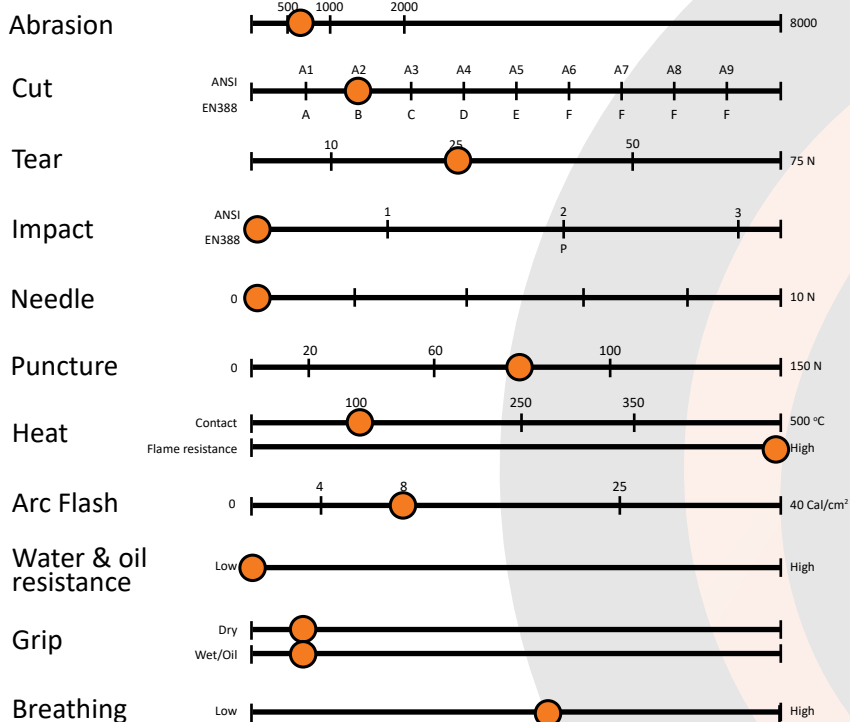

TECHNICAL PROPERTIES


EN388

2X2XB
EN407

4131XX
ARC FLASH
ASTM F2675, ATPV=
7,9 Cal/cm² (back of hand)
EN 61482 Modified by Aitex (Box Test)=
Class 1
NFPA 70E=
Level 1

 ISO (A-F)
 A | > 2 N
 B | ≥ 5 N
 C | ≥ 10 N
 D | ≥ 15 N
 E | > 22 N
 F | > 30 N


CE
CAT II

7	9	11
XS	M	XL

 ART.NO: 18-2HAD-8
 60 pairs (5 dozen)/Carton



TEKNISKA EGENSKAPER

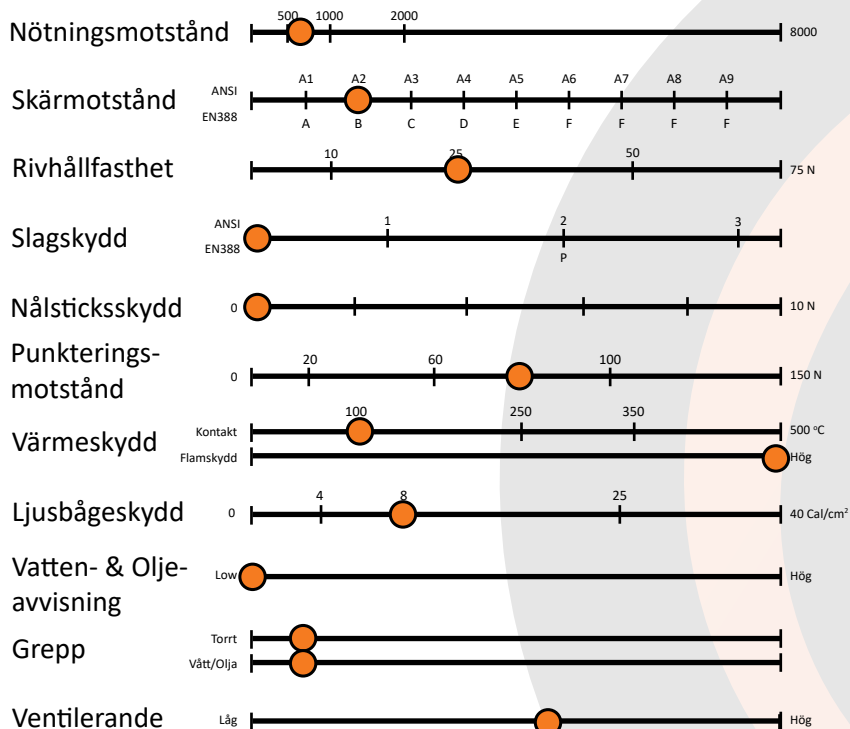

EN388



2X2XB

EN407



4131XX

ARC FLASH

ASTM F2675, ATPV=

7,9 Cal/cm² (bakhand)

EN 61482 Modified by Aitex (Box Test)=

Class 1

NFPA 70E=

Level 1

ISO (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | > 22 N
F | > 30 N




CE
CAT II

7	9	11
XS	M	XL

Art.nr: 18-2HAD-8
60 par (5 dussin)/Kartong



TECHNISCHE EIGENSCHAFTEN

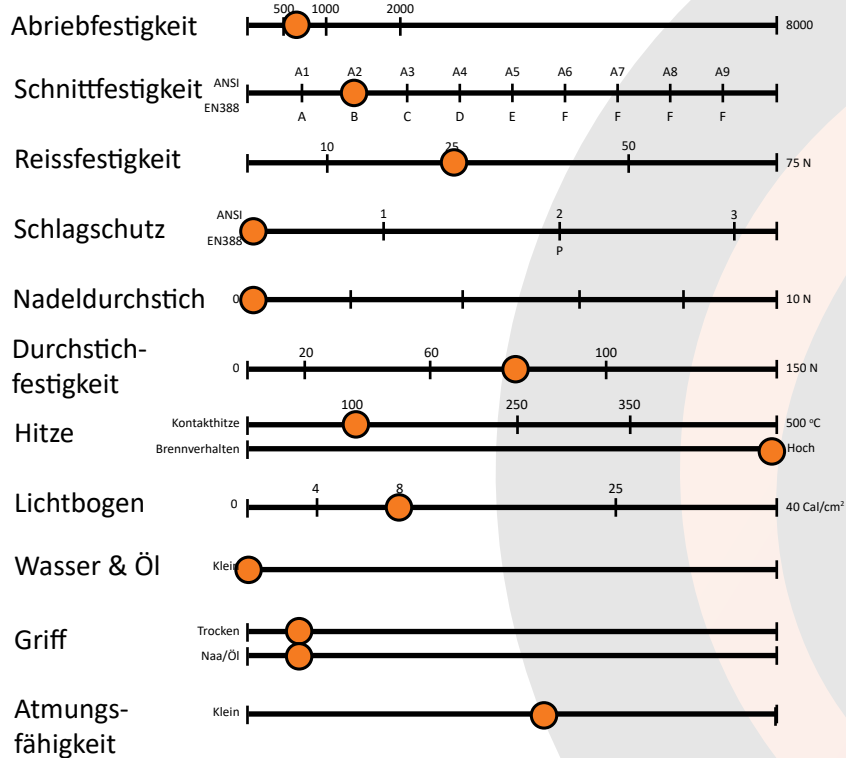

EN388



2X2XB

EN407



4131XX

ARC FLASH

ASTM F2675, ATPV=

7,9 Cal/cm² (handrücken)

EN 61482 Modified by Aitex (Box Test)=

Class 1

NFPA 70E=

Level 1

ISO (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | > 22 N
F | > 30 N




Art.nr: 18-2HAD-8
60 paar (5 dutzend)/Karton

CE
CAT II

7 9 11
XS M XL



PROPRIETÀ TECNICHE

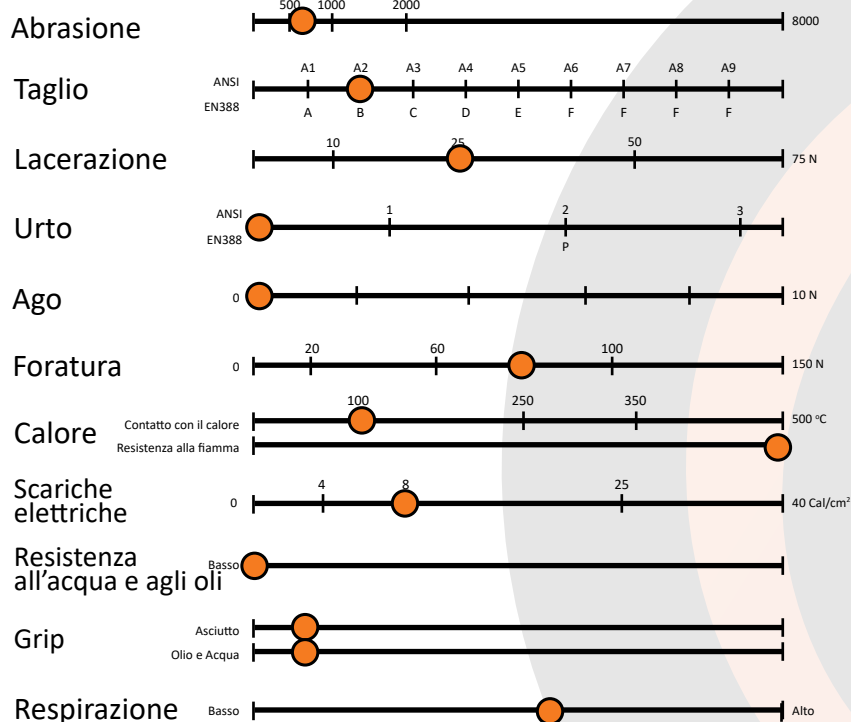

EN388



2X2XB

EN407



4131XX

ARC FLASH

ASTM F2675, ATPV=

7,9 Cal/cm² (dorso della)

EN 61482 Modified by Aitex (Box Test)=

Class 1


NFPA 70E=

Level 1

ISO (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | > 22 N
F | > 30 N




ART.NO: 18-2HAD-8
60 paia (5 dozen)/Cartone





PROPIEDADES TÉCNICAS

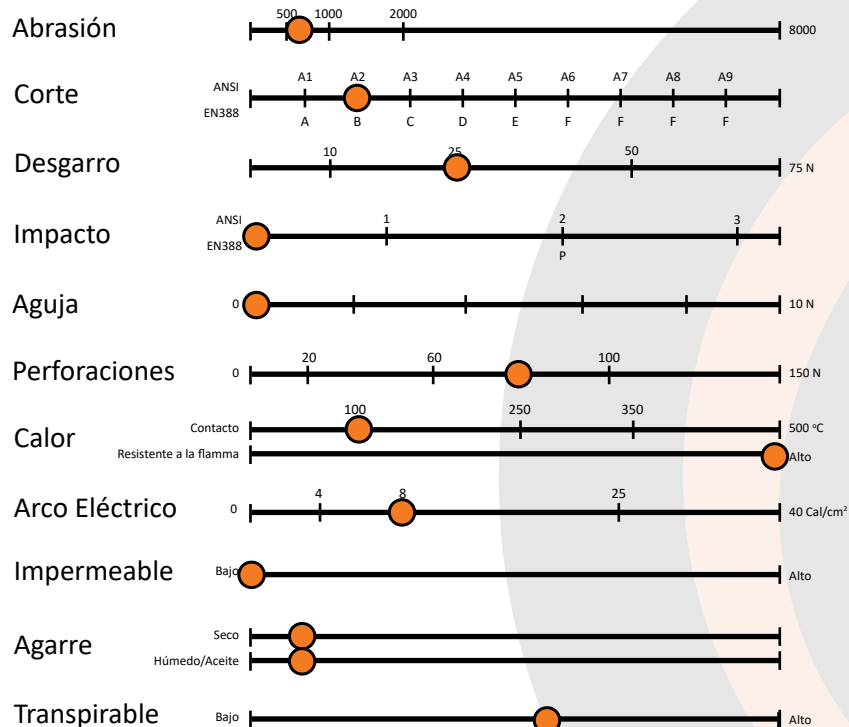

EN388



2X2XB

EN407



4131XX

ARC FLASH

ASTM F2675, ATPV=

7,9 Cal/cm² (parte de atrás de la mano)

EN 61482 Modified by Aitex (Box Test)=

Class 1

NFPA 70E=

Level 1

CE
CAT II

A: RESISTENCIA A LA ABRASIÓN (1-4)
B: RESISTENCIA AL CORTE (1-5)
C: RESISTENCIA AL DESGARRO (1-4)
D: RESISTENCIA A PERFORACIONES (1-4)
E: ISO RESISTENCIA AL CORTE (A-F)
F: IMPACTO (P=pass)

ISO (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | ≥ 22 N
F | > 30 N




ART.NO: 18-2HAD-8
60 pares (5 docena)/Cartón

7	9	11
XS	M	XL



WŁAŚCIWOŚCI TECHNICZNE

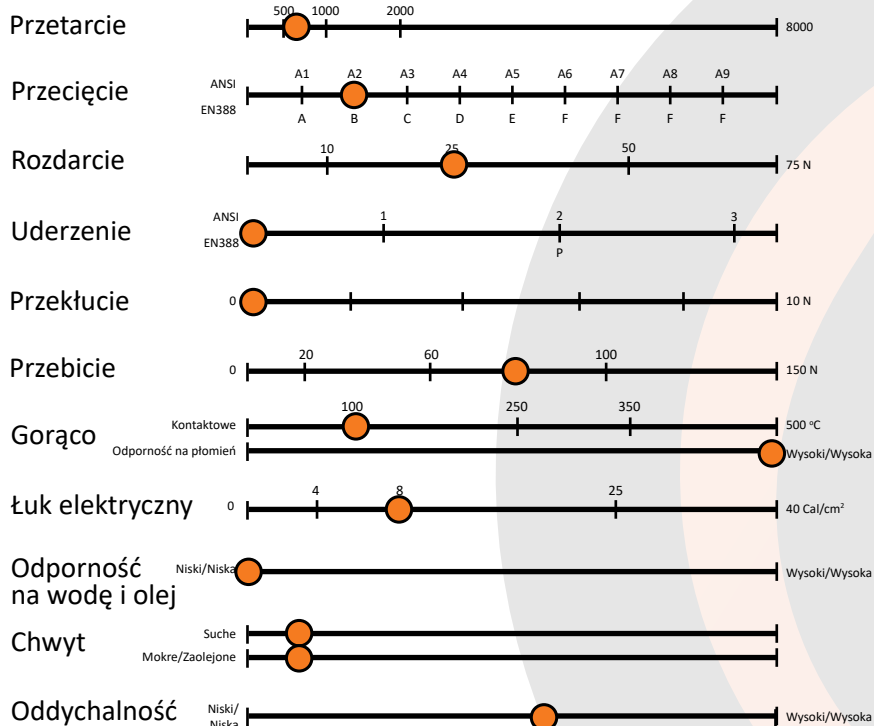

EN388



2X2XB

EN407



4131XX

ARC FLASH

ASTM F2675, ATPV=
7,9 Cal/cm² (Góra dłoni)

EN 61482 Modified by Aitex (Box Test)=

Class 1

NFPA 70E=

Level 1



ISO (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | > 22 N
F | > 30 N



ART.NR: 18-2HAD-8
60 par (5 tuzinów) / karton

7	9	11
XS	M	XL